M2 LABS

M2-LABS.COM

FUZZOCALYPSE

OWNER'S MANUAL



REV. NOV 1, 2026

CONTROLS

DC 9V
Power jack, on the top edge. 9 V DC only.

CHAOS SWITCH
Left is off, right is on. Off is the lower gain mode, darker and tighter. On is much more gain with a brighter upper-mid voice and a big jump in volume, so lower LEVEL before switching CHAOS on.

FUZZ
Sets how much fuzz and sustain, from gritty and dynamic to full saturated fuzz.

TONE
An active treble control. Left is darker and smoother, noon is close to neutral, right is brighter and more cutting.

LEVEL
Sets your output volume.



ROENTGEN GAUGE
The needle follows your FUZZ setting. Details are on the next page.

OUTPUT
Output jack, on the left side. Connect this to your amp or the next pedal.

INPUT
Input jack, on the right side. Plug your guitar in here.

FOOTSWITCH
Press to switch the pedal on and off.

BEFORE YOU SWITCH CHAOS ON

Lower LEVEL before switching CHAOS on. The jump in volume is big.

POWER

9 V DC ONLY.

DO NOT USE 12 V OR 18 V SUPPLIES.

Use a regulated 9 V supply, ideally with an isolated output.

Center negative. Use the correct polarity.

Power jack	2.1 mm barrel, center negative
Battery	None. Power from a 9 V DC supply only.

CURRENT DRAW

350 mA


9 V DC

ROENTGEN GAUGE

The roentgen gauge is backlit, and the backlight is always lit whenever the pedal has power.

The needle follows the FUZZ knob. It reads zero at minimum and rises as you turn it up. It shows the setting, not your playing.



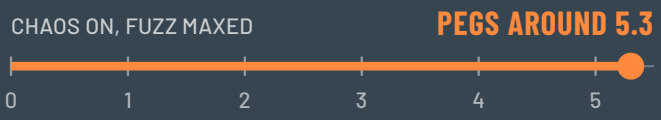

With CHAOS on, the reading is higher across the whole range of the FUZZ knob.

GETTING STARTED



FUZZ
Noon



TONE
Noon



LEVEL
About 9 o'clock



CHAOS
Off

Then bring LEVEL up to match your bypassed volume.

PLACEMENT

Put Fuzzocalypse first in your chain, straight after the guitar and before any wah or buffered pedals. It reacts to your guitar and sounds best fed directly.

SPECIFICATIONS

FUZZOCALYPSE

Power	9 V DC
Current draw	350 mA
Power jack	2.1 mm barrel, center negative
Battery	None. Power from a 9 V DC supply only.
Bypass	True bypass
Size	4.1 × 4.86 in (104 × 123 mm)
Weight	17.4 oz (494 g)

CARE

Wipe the enclosure with a soft, dry cloth and keep the pedal dry.



M2 LABS

M2-LABS.COM

HANDBUILT IN ATLANTA, GA